



### **Filter Pressure Test (FPT)**

The OCS Filter Pressure Test (FPT) determines the Filter Pressure Value (FPV), i.e. the pressure rise measured over time upstream of the screen filter as an indication of the melt purity or dispersibility of added colour pigments. The OCS Measuring Extruder (ME) melts and homogenises the test material, which is then delivered to the filter via a melt pump at a defined and constant volume flow. The increasing pressure of the polymer melt is displayed, continuously recorded and finally evaluated.

### **Testable Raw Materials**

Pellets

#### **Features**

- Pressure and melting temperature measurement
- Simple sieve change
- Data recording and evaluation using OCS Filter Test Software
- Fulfilment of DIN EN 13900-5

### Compatible with

• OCS Measuring Extruder (ME)

#### **Sales Team**



T +49 2302 95622-0 F +49 2302 95622-33 info@ocsgmbh.com www.ocsgmbh.com


### Address

OCS Optical Control Systems GmbH Wullener Feld 24 58454 Witten Germany



_			_		
Tec	hni	cal	H)	etai	IS.


Barrel diameter	20, 25, 30 mm (3 heating zones with thermocouples for barrel, 4 additional heating zones for melt pump and adapter, 3 cooling zones
	with low-pressure blower)
Screw compression	1:1, 2:1, 3:1, 4:1, with and without
	mixing zone (others on request)
Rotation	0-150 rpm

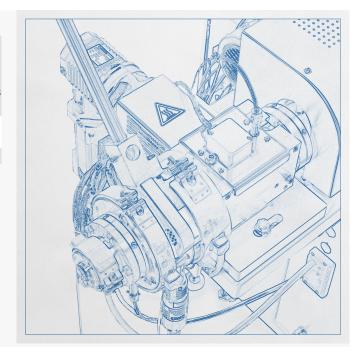

## **More Product Pictures**









### **Similar Products**



# Measuring Extruder (ME20/ME25/ME30/ME40/ME45)

The OCS Measuring Extruder (ME) is used for the production of polymer films for laboratory and small series production. The extruder is equipped with a flat film die and, if necessary, a downstream OCS Modular Film Analyser to enable further quality measurements. The system is controlled via a touch panel to set up device parameters and recipes. In addition, the optional Remote Control Function allows the Measuring Extruder (ME) to be displayed and controlled from various locations. Another feature is the automatic turning system, which allows easy cleaning of the extruder barrel, die and screw. The extruder then automatically ... [read more on our Websitel



### **Cast Film Line**

The OCS Cast Film Line is used to perform optical and physical property measurements of polymers in the production of high-quality cast (flat) films (extrusion, cooling, stripping and winding). All settings and parameters, e.g. extruder speed, temperature, film tension, winding force, winder diameter, are stored by a touch panel control system which guarantees that the film quality can be reproduced at any time. This is an important parameter for optical and physical on-/offline measurements, for example in detecting gels, contaminations, degradations and other impurities as well as haze, gloss, density and additive measurement. Possible testable polymers include, for example, ... [read more on our Website]



### **Blown Film Line**

The OCS Blown Film Line is used to carry out optical and physical property measurements of polymers in the production of high-quality blown films (blowing, cooling, laying flat, hauloff and winding). All parameters of the line, e.g. extruder speed, temperature, haul-off speed, film width, film bubble ratio, are stored by a touch panel control system, which ensures that the film quality is reproducible at any time. This is an important parameter for optical and physical on-/offline measurements, for use with gels, impurities, fibres and other contaminants, as well as for turbidity, transmission, gloss, density and additive measurements. Possible testable ... [read more on our Website]

Images, drawings and data are non-binding and subject to modification without prior notice. © 2025. All rights reserved - OCS Optical Control Systems GmbH | Wullener Feld 24 | 58454 Witten, Germany